



RV MicroQuiet™ 4000 GenSet



RV GenSet

- Microprocessor Control with Diagnostics
- Exceptionally Smooth, Quiet Operation
- Sealed Connectors
- Full Housing with Enclosed Muffler
- 3-Year Limited Warranty
- Lightweight, Compact
- Overhead Valve Engine for Efficiency, No Decarboning
- Quieter than National Park Sound Level Standards

Ratings and Models

Model	Fuel	Hz	RPM	Watts	Voltage	Amps	Phase	Circuit Breaker
4.0 KY/FA/26100J	Gasoline	60	3600	4000	120	33.3	1	30A, 1-pole
3.6 KY-FA/26120J	LP	60	3600	3600	120	30.0	1	30A, 1-pole
4.0 KY-FR/65697J	Gasoline	60	3600	4000	100(1,4)	40.0	1	20A, 2-pole
4.0 KY-FR/11429J	Gasoline	60	3600	4000	100(2,4)	40.0	1	20A, 2-pole
4.0 KY-FA/11580J	Gasoline	60	3600	3600	120	33.3	1	30A, 1-pole
3.6 KY-FR/11572J	Gasoline	50	3000	3600	100	36.0	1	20A, 2-pole
3.3 KY-FR/25119J	LP	50	3000	3300	230(3,4)	14.3	1	17A, 2-pole
3.6 KY-FR/33742J	Gasoline	50	3000	3600	230(3,4)	15.7	1	17A, 2-pole

(1) Isolated neutral, (2) Grounded neutral, (3) Adjustable 220-240, (4) Reconnectable to 110/250 or 120/240

Weight, Size and Sound Level

- 174 lbs. (83.4 kg) (60 Hz)
- Length 30 in. (762 mm), Width 19.7 in. (500.4 mm), Height 13.9 in. (353.1 mm)
- 60 Hz 66 dB(A) @ 10 ft. (3 m), 1/2 load*
- 50 Hz 59 dB(A) @ 10 ft. (3 m), 1/2 load*

*Typical RV installation



GeneratorJoe

4016 Quartz Drive
 Santa Rosa, CA 95405
 Phone: 707 539-9003
 Fax: 707 539-5212

Email: sales@generatorjoe.NET
 Web www.generatorjoe.NET

Standard Features

- Microprocessor control with digital voltage regulator
- Starter overcrank protection
- Generator field overload protection
- Over/under frequency protection
- Over/under voltage protection
- Loss of AC sense protection
- Mechanical fault protection
- Reverse connections and high battery voltage protection
- 4-point vibration isolator mounting system
- Magnetic circuit breaker
- Automatic resetting of DC circuit overcurrent protection for set wiring and remote start wiring
- Integral enclosure cover and stamped steel base
- Stationary exhaust pipe attachment point
- High stability mechanical governor
- Detects starter faults
- Sealed remote start connector
- Automotive-type starter with automatic start disconnect
- Fuel filter
- Electric magneto ignition
- USDA Forest Service-approved, spark-arresting muffler
- Cross-flow pressure cooling
- Automatic choke
- Electric fuel pump with positive fuel safety shutoff (gasoline)
- 125 in. (3.2 m) generator output leads
- Electric fuel shutoff solenoid (LPG)
- Intake silencer, sound deadening material and baffles reduce sound level
- Start-stop/prime rocker switch on control with LED status indicator light for set diagnostics

Engine Detail

Model: Onan E095H
Design: 4-cycle, overhead valve, single horizontal cylinder
Displacement: 18.5 in³ (304 cm³)
Compression Ratio: 8.5:1
Maximum Power at 60 Hz
 LPG - 8.6 bhp (6.4 kW)
 Gasoline - 9.5 bhp (7 kW)
Maximum Power at 50 Hz
 LPG - 7.6 bhp (5.7 kW)
 Gasoline - 8.3 bhp (6.2 kW)
Cooling: Cross Flow Air - Pressure Type
Cooling Air Volume:
 60 Hz: - 300 ft³/min (8.5 m³/min)
 50 Hz: - 250 ft³/min (7.1 m³/min)
Combustion Air Volume:
 60 Hz: 19 ft³/min (0.5m³/min)
 50 Hz: 16 ft³/min (0.45m³/min)

Average Fuel Consumption:

Gasoline	<u>No Load</u>	<u>Half Load</u>	<u>Full Load</u>
	gph(l/h)	gph(l/h)	gph(l/h)
60 Hz 4.0 KY	0.29 (1.10)	0.48 (1.80)	0.71 (2.70)
50 Hz 3.6 KY	0.20 (0.80)	0.37 (1.40)	0.58 (2.20)
Propane	<u>No Load</u>	<u>Half Load</u>	<u>Full Load</u>
	lbs/h(kg/h)	lbs/h(kg/h)	lbs/h(kg/h)
60 Hz 3.6 KY	1.54 (0.70)	2.43 (1.10)	3.09 (1.40)
50 Hz 3.3 KY	1.10 (0.50)	2.20 (1.00)	2.87 (1.30)

Sidedraft Carburetor: KY (Gasoline)
Electric Fuel Pump: Positive fuel shutoff (3 psi), fuel lift 3 ft (914 mm)
Air Cleaner: Replaceable dry element
 Patented automatic choke
Vapor Withdrawal System with Demand Regulator: KY (LPG)
Ignition System: Electronic magneto type
Starting System: Remote, 12 V, 3-wire negative ground
Starter: Automotive type with environmentally protected pinion; automatic start disconnect
Lubrication: Splash lubrication
Oil Capacity: 1.6 qt. (1.5 L)
Cylinder-Crankcase: Aluminum alloy with iron cylinder liner cast into the block, aluminum alloy oil base
Cylinder Head: Aluminum, valves in head, removable

Generator Detail

Design: Onan, revolving field, AC, 2-pole self-excited. Permanently aligned to engine by a tapered shaft. Drip-proof construction.
Insulation System and Temperature Rise: Meets ANSI/RVIA-EGS-1-1998, BS-4999, and CSA Bulletin 946 standards.
Cooling: Direct drive centrifugal blower. Air required; includes engine cooling air volume:
 60-Hz: 300 ft³/min (8.5 m³/min)
 50 Hz: 250 ft³/min (7.1 m³/min)
 Cast aluminum housing for excellent heat transfer

Voltage Regulation: Microprocessor control with digital voltage regulator.
Rotor: Laminated electrical steel assembly press fitted to shaft, balanced. Heavy insulated copper wire windings. Amortisseur windings for improved waveform and motor starting.
Stator: Laminated electrical steel assembly. Heavy insulated copper wire windings.
DC Brushes: Electrographic; long life
Bearing: Double-sealed, prelubricated ball bearing

GenSet Performance

Air Conditioner Starting: (60 Hz - Gasoline) One 13,500 BTU air conditioner with 2,000 W baseload at 500 ft (152.4 m) and 100°F (38°C).


Frequency and Voltage Regulation: Exceeds requirements of ANSI/RVIA EGS-1- 1998.



GeneratorJoe

4016 Quartz Drive
 Santa Rosa, CA 95405
 Phone: 707 539-9003
 Fax: 707 539-5212
 Email: sales@generatorjoe.NET
 Web www.generatorjoe.NET

Basic Dimensions

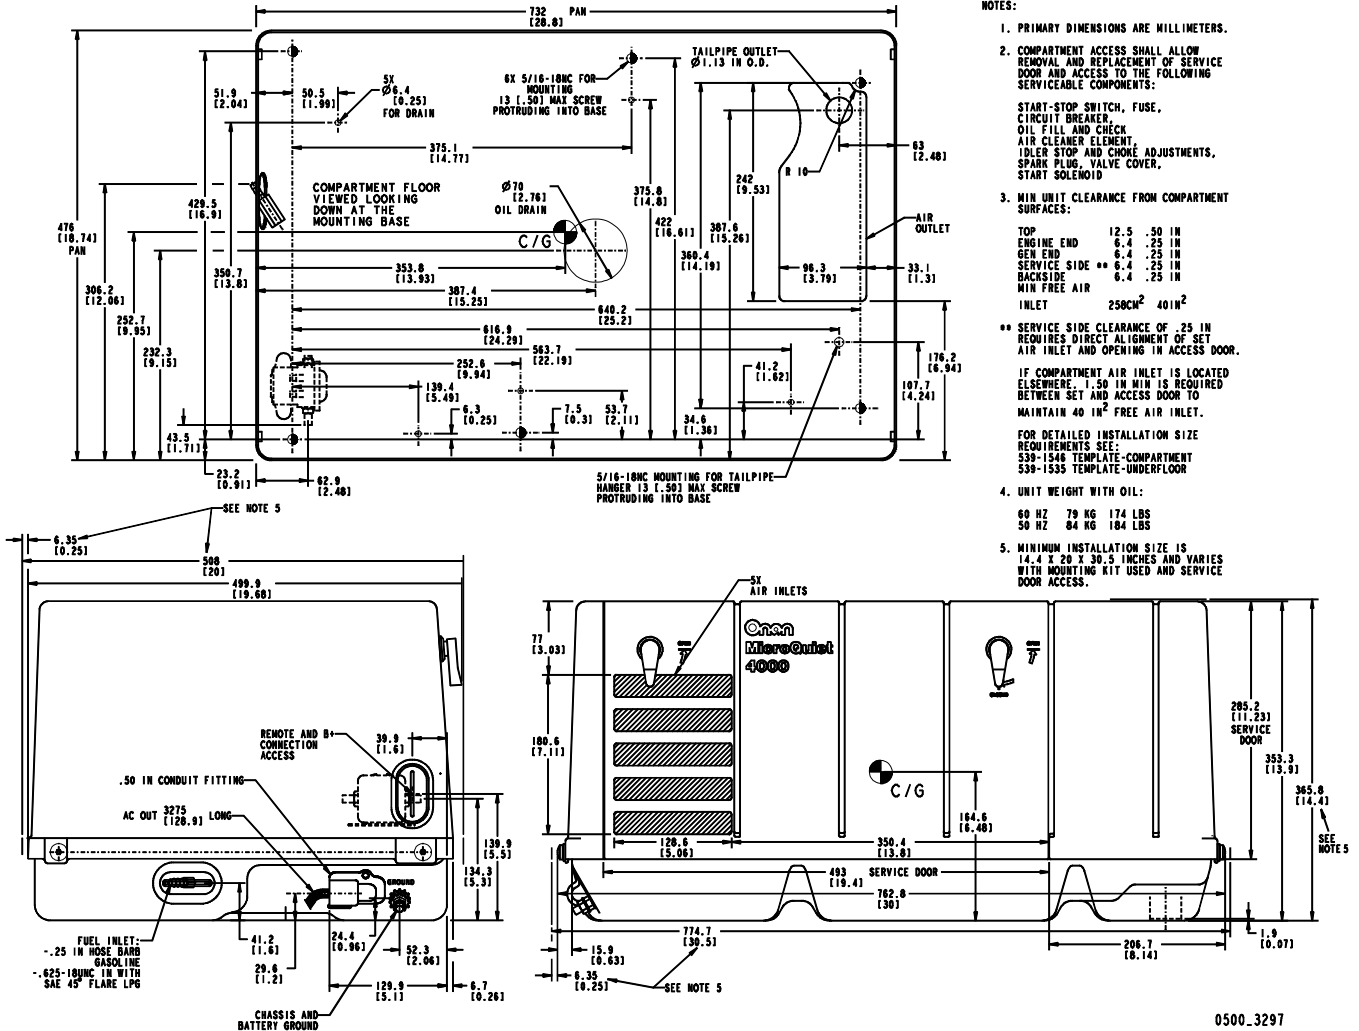

CAUTION: Drawings are supplied for reference only and should not be used for design or installation.

Options and Accessories

- Standard underfloor mounting kit (P/N 403-3670) bolts through floor
- Template, (P/N 539-1535-01) to use with the mounting kit (P/N 403-3670), may also be ordered
- Template for compartment mount (P/N 539-1546-01)
- Base adapter underfloor mounting kit (P/N 403-3630). Allows unit to be mounted using Marquis mounting kit. Can be used with Marquis housing kit P/N 405-4241 or equivalent
- Housing kit for underfloor mounting (P/N 405-4241) requires base adapter (P/N 403-3630)
- Battery, 12 volt, 460 cold cranking amps at 0°F (-18°C) (P/N 416-0717).
- Remote control panel including start-stop/prime switch with status indicator light (P/N 300-5331)
- Remote control panel including start-stop/prime switch with status indicator light and hourmeter (P/N 300-5332)
- Remote control panel including start-stop/prime switch with status indicator light and DC voltmeter (P/N 300-5333)
- Remote control pigtail adapter (P/N 300-4946)
- Remote control plug and wire harness (10 ft. - P/N 338-3489-01, 30 ft. - P/N 338-3489-02)
- Exhaust tailpipe kit (P/N 155-2845) tailpipe and special hanger
- Exhaust kit 1.5 in (P/N 155-2847) 90° elbow
- Exhaust kit adapter (P/N 155-2850) straight tube adapter

Refer to RV Generator Accessories and Service Support Catalog (F-832) for more detailed information.

Onan Testing for RV Application

Tested at extremes of temperature -20° F (-29° C) to 120° F (49° C) for starting and operation.
Tested with RV loads, air conditioners, microwaves, converter, TVs, VCRs.
Tested installed. Onan owns RVs used for product development testing.
Tested in high humidity conditions.
Tested in salt spray conditions.
Tested in heavy airborne dust conditions.
Field Test program.
60 Hz (120V only) models listed by SGS United States Testing Company, Inc. per ANSI/EGS-1-1998 and CSA-certified per Electrical Bulletin 946.
Ratings apply to altitudes up to 500 ft (150 m), 85° F (29° C) ambient with muffler, in RV enclosure.
60 Hz models meet U.S. EPA Phase I and 1995-2001 California emission regulations for small off-road engines.



Operating Temperature Range

Gasoline sets will operate from -20°F (-29°C) to 120°F (49°C). LPG sets will operate from 0°F (-18°C) to 120°F (49°C). LPG set starting and operation below 32°F (0°C) depends upon LP tank capacity, surface area and butane content of LPG.

Warranty Policy

The ONAN Limited Warranty covers virtually everything except routine maintenance for the first two years you own your RV generator set, and covers parts and labor on major power train and generator set parts during the third year. In addition, it also includes a free 90-day adjustment policy, which provides that Onan will make minor adjustments to your new genset during the first three months you own it - free of charge! Please note: The Onan 3-year Limited Warranty applies to RV generators used in RV applications only, and does not apply to RV generators used in commercial mobile applications.

For complete Onan Limited Warranty details see your Onan Distributor or Certified Onan Service Dealer.

After Sale Support

GENUINE ONAN MAINTENANCE CARE PARTS AND PRODUCTS

For your ongoing satisfaction and the dependability of your Onan RV genset, Onan offers a complete line of replacement and tune-up parts, oil and maintenance chemicals specifically designed for RV gensets. Easy to find at certified Onan RV Service and Parts Dealers coast-to-coast, Onan Green Label™ RV parts are packaged for correct selection and convenient on-board storage.

EASY TO LOCATE CERTIFIED ONAN RV SERVICE AND PARTS DEALERS

Onan has trained, tested and certified over 1,000 Onan RV Service Dealers covering most major metropolitan areas in the U.S. and Canada.



See Your Onan Distributor:



GeneratorJoe

4016 Quartz Drive
Santa Rosa, CA 95405
Phone: 707 539-9003
Fax: 707 539-5212

Email: sales@generatorjoe.NET
Web www.generatorjoe.NET

WARNING:
Do not use this genset on a boat. Such use may violate U.S. Coast Guard regulations, and can result in severe personal injury or death from fire, explosion, electrocution, or carbon monoxide poisoning.

Onan®

Onan is a registered trademark of Onan Corporation.
Printed in U.S.A.

WARNING: Backfeed to a utility system can cause electrocution and/or property damage. Do not connect to any building's electrical system except through an approved device and after building main switch is opened.